


CHARGING HOSES

Mastercool uses only **(GRADE 5 HOSE)** with a selection of Standard and Nylon Barrier for high pressure applications. Knurled brass nuts make finger tightening easy. **Crimped with 8 segment dies for secure fit and maximum durability.** Hoses are available in sets and a variety of lengths to meet all EPA, SAE and UL requirements for containment of refrigerant.

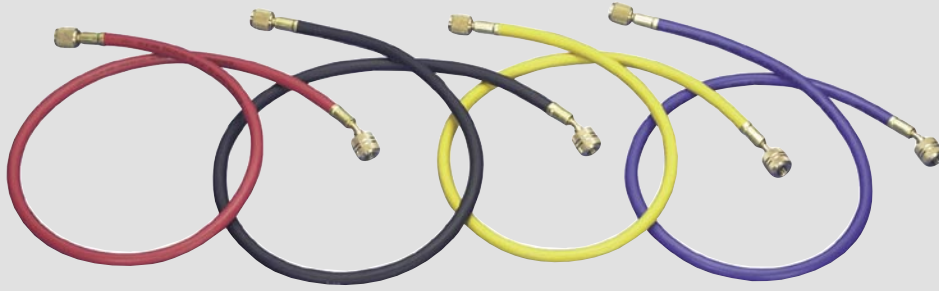

STANDARD & HIGH PRESSURE HOSES W/STANDARD FITTINGS (1/4" SAE)

Standard Hoses, Working pressure 750 PSI, Burst 3000 PSI

Nylon Barrier Hoses, Working Pressure 800 PSI, Burst 4000 PSI

HOSE LENGTH	36"	60"	72"	96"	HOSE LENGTH	36"	60"	72"	96"
Blue 1/4"	41361	41601	41721	41961	Blue 1/4"	47361	47601	47721	47961
Yellow 1/4"	41362	41602	41722	41962	Yellow 1/4"	47362	47602	47722	47962
Red 1/4"	41363	41603	41723	41963	Red 1/4"	47363	47603	47723	47963
Black 1/4"	N/A	N/A	N/A	N/A	Black 1/4"	47364	47604	47724	47964
Sets* 1/4"	40336	40360	40372	40396	Sets* 1/4"	47336	47360	47372	47396
Black 3/8"	N/A	N/A	N/A	N/A	Black 1/4" W (3/8" fitting)	48364	48604	48724	48964

* Sets include one blue, one red and one yellow hose.



STANDARD & HIGH PRESSURE HOSES W/AUTOMATIC SHUT-OFF VALVE FITTINGS (1/4" SAE)

Standard Hoses, Working pressure 750 PSI, Burst 3000 PSI

Nylon Barrier Hoses, Working Pressure 800 PSI, Burst 4000 PSI

HOSE LENGTH	36"	60"	72"	96"	HOSE LENGTH	36"	60"	72"	96"
Blue 1/4"	45361	45601	45721	45961	Blue 1/4"	46361	46601	46721	46961
Yellow 1/4"	45362	45602	45722	45962	Yellow 1/4"	46362	46602	46722	46962
Red 1/4"	45363	45603	45723	45963	Red 1/4"	46363	46603	46723	46963
Black 1/4"	N/A	N/A	N/A	N/A	Black 1/4"	46364	46604	46724	46964
Sets* 1/4"	45336	45360	45372	45396	Sets* 1/4"	46336	46360	46372	46396

Auto shut-off valves automatically retain refrigerant in the service hose when they are removed from the system, meets EPA, SAE and UL standards for containment of refrigerant.

* Sets include one blue, one red and one yellow hose.




STANDARD & HIGH PRESSURE HOSES W/MANUAL SHUT-OFF VALVE FITTINGS (1/4" SAE)

Standard Hoses, Working pressure 750 PSI, Burst 3000 PSI

Nylon Barrier Hoses, Working Pressure 800 PSI, Burst 4000 PSI

HOSE LENGTH	36"	60"	72"	HOSE LENGTH	36"	60"	72"
Blue 1/4"	90263-36	90263-60	90263-72	Blue 1/4"	49263-36	49263-60	49263-72
Yellow 1/4"	90264-36	90264-60	90264-72	Yellow 1/4"	49264-36	49264-60	49264-72
Red 1/4"	90265-36	90265-60	90265-72	Red 1/4"	49265-36	49265-60	49265-72
Sets* 1/4"	90262-36	90262-60	90262-72	Sets* 1/4"	49262-36	49262-60	49262-72

* Sets include one blue, one red and one yellow hose.

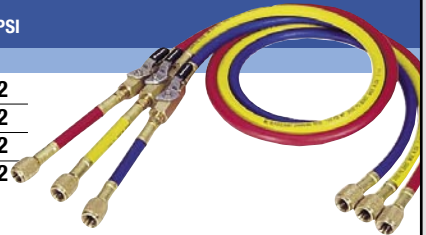


R134a HOSES WITH 1/2" ACME-F AND 14MM-M AUTO A/C FITTINGS

HOSE LENGTH	36"	60"	72"	96"
Blue-14mm-M x 1/2" ACME-F	84361	84601	84721	84961
Yellow W/Shut-off Valve-1/2" ACME-F	84362	84602	84722	84962
Red-14mm-M x 1/2" ACME-F	84363	84603	84723	84963
Black-1/2" ACME-F	84364	84604	84724	84964
Yellow W/O Shut-off Valve	84365	84605	84725	84965
Sets*	84336	84360	84372	84396

Mastercool R134a charging hoses meet SAE J2196 specifications and are UL tested. Tested for working pressure of 600 PSI and burst pressure of 3,000 PSI.

* Sets include one blue, one red and one yellow hose.



800-290-9798



www.rossairworks.com